

# Full Data Modules



## AES IntelliTap 7067


### Full Data for Burglary Monitoring Through the DACT

The IntelliTap monitors the alarm panel's digital communicator output. In normal operation, the alarm panel dials the IntelliTap designated phone number as the primary central station receiver. The IntelliTap detects this information and receives the data like a dialer receiver, providing handshake signals to authenticate a successful transfer. The alarm data is then forwarded, via the AES-IntelliNet wireless network, to the central station.

- Supports popular formats such as 3+1, 4+1, 4+2, CID
- Telephone line cut monitoring with adjustable 1,2,3 minute delay
- Works with or without a phone line
- DTMF Compatible

The IntelliTap is an accessory for AES Transceiver Units:

- AES 7750-F Series
- AES 7450 Series
- AES 7050-E Series

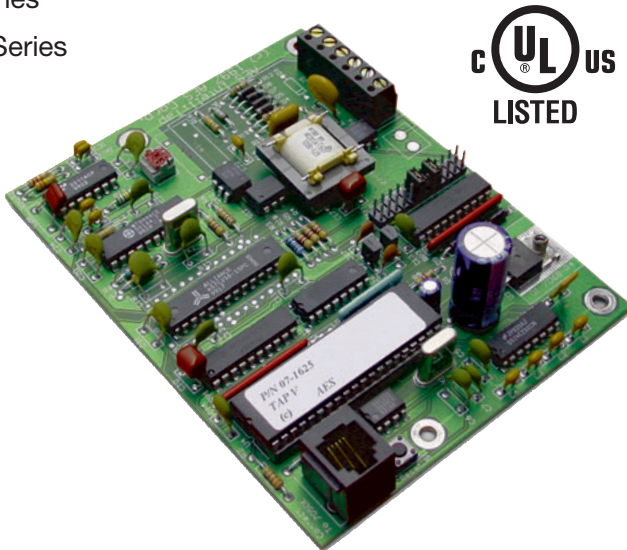

#### Technical Specifications

##### I/O Connections

- RS-232 Data link
- Incoming phone line
- Phone output from alarm panel
- House phone

##### Formats Supported

3+1, 4+1, 4+2, Contact ID

##### Controls

- 1 reset switch
- Jumper pins for programming

##### Size

3.9" x 5" x 1"/9.9 x 12.7 x 2.5 cm

##### Mounting


Inside AES RF Transceiver Unit

##### Power Requirements

12 VDC nominal, primary and backup power provided by the AES RF Transceiver Unit

##### Current

50mA normal; 320mA when trouble output is activated  
A 12V, 7A-Hr battery provides 24-hour backup

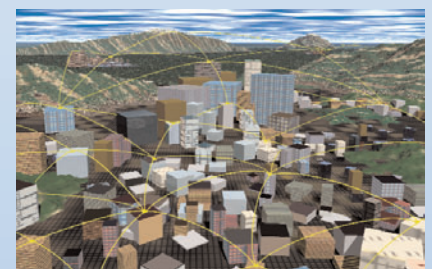

Wireless mesh networking is an innovative technology adopted by many industries with applications that need to communicate data over a large geographic area with a high level of reliability at a low total cost of ownership.

The advanced design and 2-way communications capability provides easy installation, expansion, and management when compared to alternative communication methods, both wired and wireless.