

# 7350

**AES** *IntelliNet*  
CORPORATION | For Alarm Monitoring

## Integrated Transceiver Kit

Wireless Alarm Communications  
Integrated Inside the Alarm Panel



The 7350 Integrated Transceiver Kit (ITK) is primarily an AES-*IntelliNet* network PCB and radio integrated into a single component case. It is designed to be housed as an add-in communications component to a customer's alarm panel rather than to be deployed in a separate enclosure with a separate power source. The small footprint and component-type design offer a very cost effective solution to deploying and expanding an AES-*IntelliNet* network for those who can install them into existing alarm panels.


### Easy Installation

The 7350 transceiver is installed by mounting it into a customer's alarm panel. From there, the alarm panel's alarm outputs and power are connected to the 7350 transceiver. The AES-*IntelliNet* antenna is secured to the alarm panel enclosure and connected to the 7350 transceiver. The 7350 Transceiver self-enrolls into the AES-*IntelliNet* wireless network, receives signals from the alarm panel and transmits them via wireless mesh radio to the AES-*IntelliNet* central receiver.

### Low Power Requirements

The 7350 Transceiver, installed into an alarm control panel, draws power from the alarm panel's power supply, thereby

- Offers Best Price/Performance
- Mounts in Existing Alarm Panel
- Small Size Reduces Shipping Costs
- Eliminates Need for Separate Enclosure and Power Supply
- Modular Design

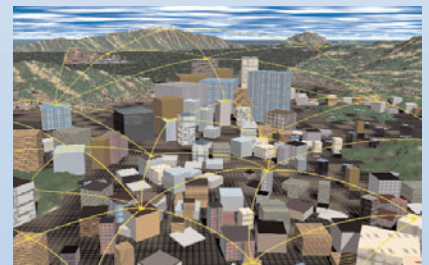

Wireless mesh networking is an innovative technology adopted by many industries with applications that need to communicate data over a large geographic area with a high level of reliability at a low total cost of ownership.


The advanced design and 2-way communications capability provides easy installation, expansion, and management when compared to alternative communication methods, both wired and wireless.

# 7350

eliminating the need for a separate power supply. The steady state current draw is only 150mA. The peak current draw of 1000mA to 1500mA for RF power output levels of 2W-5W respectively, are only for a very short transmit duration of less than 1/3 second thereby allowing it to use the standard power supply of most alarm panels.

## Modular Kit

Each 7350 ITK comes with the integrated AES PCB and radio along with a standard omni-directional antenna. The ITK also includes a 26 pin interface board for connecting to the alarm panel's power and outputs. The antenna supplied is a 2.5 dB antenna with a TNC male to BNC male assembly specified for the customer's frequency range. The radios are programmable for frequencies in the UHF and VHF ranges.

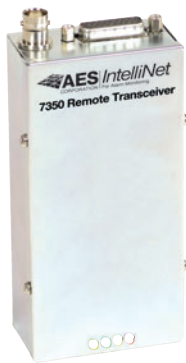

### Accessories

7085 - RF Programmer  
7041 - Subscriber Programmer  
7067 - IntelliTap

AES-IntelliNet™ is the industry leader in delivering high quality wireless mesh networks to the fire and security industry in commercial, corporate, government, and educational applications with its broad line of products and advanced network management tools. Users of AES-IntelliNet networks have gained significant revenue, communications, and cost advantages while meeting the high standards of reliability required for the fire and security industry. AES-IntelliNet alarm monitoring systems are deployed at hundreds of thousands of locations in over 130 countries.



**For more information**

**Call 800-AES-NETS (800-237-6387)**

AES Corporation | 285 Newbury Street | Peabody, MA 01960 USA  
Tel. +1 978-535-7310 | Fax +1 978-535-7313 | Email [info@aes-intellinet.com](mailto:info@aes-intellinet.com)  
Web [www.aes-intellinet.com](http://www.aes-intellinet.com)

## Technical Specifications

### PLL Radio

UHF – 450-480 MHz

VHF – 150-174 MHz

### Standard Output Power

2-5 watts

### Voltage

12 VDC nominal

### Current

150mA Standby

1A Transmit (2W)

1.5A Transmit (5W)

### Alarm Signal Inputs

- 4 individually programmable Zones: NO/NC/EOL, trouble restore
- Telephone line cut monitor

### Operating Temperature Range

0° to 50°C (32° – 122°F)

### Storage Temperature Range

-10° to 60°C (14°–140°F)

### Relative Humidity Range

0-85% RHC non-condensing

### Size

2.25"W x 1.25"D x 4.75"L

(5.7cmW x 3.2cmD x 12cmL)

### Weight

8.9 oz. (276 grams)